


# DUX-20B / DUX-20 12G / 3G-SDI Converter

- DUX-20B / DUX-20 2 models
- 12G-SDI to 3G-SDI quad link conversion
- 3G-SDI quad link to 12G-SDI conversion
- 12G-SDI 4 distribution output
- 4K 3840 / 4096×2160 support
- 1 in 4 distribution output
- 4K SQD / 2SI, Level-A / B conversion (DUX-20B)



DUX-20B / DUX-20 rear image

## ■ DUX-20B Supporting Formats



IN \ OUT	12G-SDI TYPE I	3G-quad 2SI Level-A	3G-quad 2SI Level-B	3G-quad SQD Level-A	3G-quad SQD Level-B	HD-quad	HD-SDI Single
12G-SDI TYPE I	4 distribution Output	○	○	○	○	—	—
3G-quad 2SI Level-A	○	Bypass	○	○	○	—	—
3G-quad 2SI Level-B	○	○	Bypass	○	○	—	—
3G-quad SQD Level-A	○	○	○	Bypass	○	—	—
3G-quad SQD Level-B	○	○	○	○	Bypass	—	—
HD-quad	—	—	—	—	—	Bypass	—
HD-SDI Single	—	—	—	—	—	—	4 distribution Output

## ■ DUX-20 Supporting Formats

IN \ OUT	12G-SDI TYPE I	3G-quad 2SI Level-A	3G-quad 2SI Level-B	3G-quad SQD Level-A	3G-quad SQD Level-B	HD-quad	3G-SDI Single	HD-SDI Single	SD-SDI Single
12G-SDI TYPE I	4 distribution Output	○	—	—	—	—	—	—	—
3G-quad 2SI Level-A	○	Bypass	—	—	—	—	—	—	—
3G-quad 2SI Level-B	—	—	Bypass	—	—	—	—	—	—
3G-quad SQD Level-A	—	—	—	Bypass	—	—	—	—	—
3G-quad SQD Level-B	—	—	—	—	Bypass	—	—	—	—
HD-quad	—	—	—	—	—	Bypass	—	—	—
3G-SDI Single	—	—	—	—	—	—	4 distribution Output	—	—
HD-SDI Single	—	—	—	—	—	—	—	4 distribution Output	—
SD-SDI Single	—	—	—	—	—	—	—	—	4 distribution Output

# DUX-21 12G / 3G / HD / SD-SDI Distributor

- 12G / 3G / HD / SD-SDI 1 in 4 distribution output
- 4K 3840 / 4096×2160 image size support
- Reclock output

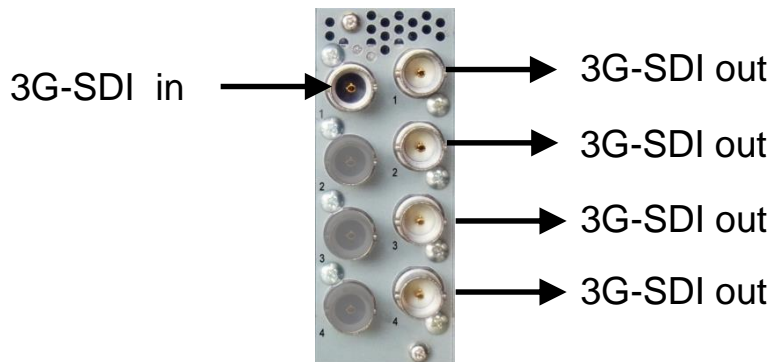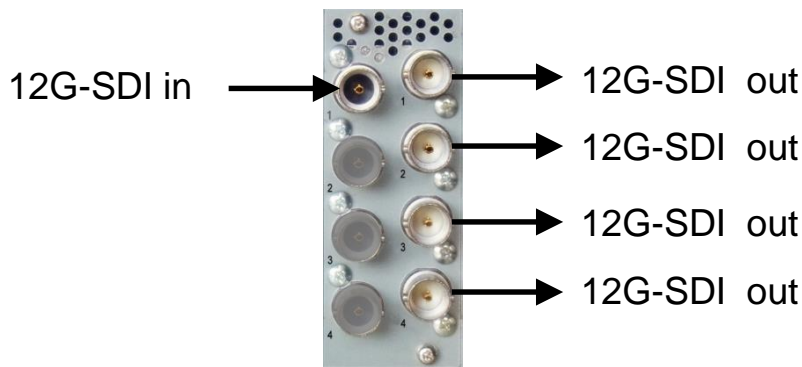

DUX-21 rear image

## ■ Single link distribution mode

